


MINI WATER HEATER


PRESSURE-TIGHT
MINI WATER HEATER
KDO/KDU
5, 10 and 15 LITRES



PRESSURE-TIGHT MINI ELECTRIC WATER HEATER KDO/KDU SERIES

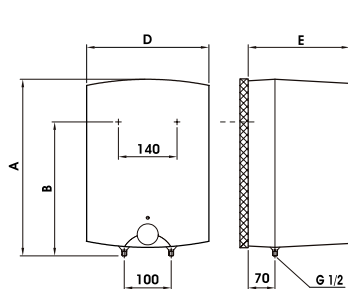

OVERSINK DESIGN

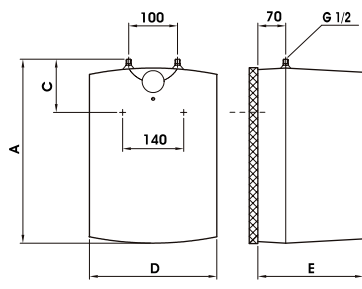

UNDERSINK DESIGN

TECHNICAL DATA:

- Capacity: 5 L, 10 L and 15 L
- Energy-saving thermal insulation
- Pressure-tight, single enamel-coated internal steel boiler with rod anode
- High-quality PU foam insulation
- Continuously adjustable temperature control up to 75 °C
- White plastic housing
- Pilot lamp
- 80 cm connection cable with plug, suspension hook and wall plugs
- Devices available as oversink and undersink versions
- Frost protection setting
- Capillary tube thermostat with all-pole safety temperature limiter
- Cold and hot water connection RG ½"
- Drainage via cold water pipe

ACCESSORIES:

- AG-S tank connection fitting RG ½" up to 6 bar for oversink mounting
- AG-U special tank connection fitting ½" up to 6 bar for undersink mounting (only with 10-L device) with special intermediate spacer for washbasin siphon-coupling

TECHNICAL DETAILS

Type	Item number	Content l	Power kW	Heating time up to 75°C in h	Dimensions in mm				
					A	B	C	D	E
KDO 052 Oversink	A 103 35	5	2,0	0,18	396	270	-	256	260
KDU 052 Undersink	A 103 34	5	2,0	0,18	396	-	144	256	260
KDO 101 Oversink	A 103 11	10	1,2	0,58	500	398	-	350	265
KDU 101 Undersink	A 103 12	10	1,2	0,58	500	-	122	350	265
KDO 102 Oversink	A 103 13	10	2,0	0,36	500	398	-	350	265
KDU 102 Undersink	A 103 14	10	2,0	0,36	500	-	122	350	265
KDO 152 Oversink	A 103 15	15	2,0	0,55	500	398	-	350	310
KDU 152 Undersink	A 103 16	15	2,0	0,55	500	-	122	350	310

ECO DESIGN - LABELING

Type	Content in litres	Heat loss in EN 12897		Electricity consumption per year (kWh/year)	Suitable for off- peak systems or with smart meter	Zapf Profile	Energy Efficiency Class
		in kWh/24h	in Watt				
KDO 052 Oversink	5	0,35	14,6	514	N	XXS	A
KDU 052 Undersink	5	0,35	14,6	525	N	XXS	A
KDO 101 Oversink	10	0,48	20,0	508	N	XXS	A
KDU 101 Undersink	10	0,48	20,0	524	N	XXS	A
KDO 102 Oversink	10	0,48	20,0	508	N	XXS	A
KDU 102 Undersink	10	0,48	20,0	524	N	XXS	A
KDO 152 Oversink	15	0,62	25,8	510	N	XXS	A
KDU 152 Undersink	15	0,62	25,8	523	N	XXS	A

Head office and factory: Austria Email AG

A-8720 Knittelfeld, Austriastrasse 6
Phone (03512) 700-0, Fax (03512) 700-239
Internet: www.austria-email.at
E-mail: office@austria-email.at
Customer Service: Phone (03512) 700-297
E-mail: kundendienst@austria-email.at

Sales offices Germany:

Germany North/East

D-14770 Brandenburg, Beetzseeufer 3
Phone 0049/(0)3381 / 766-0
Fax 0049/(0)3381 / 766-244
E-mail: sgobi@austria-email.at

Germany South

D-92637 Weiden/Opf., Parksteiner Strasse 49
Phone 0049/(0)961 / 63 490-0
Fax 0049/(0)961 / 63 490-30
E-mail: ahimer@austria-email.at

