


B30

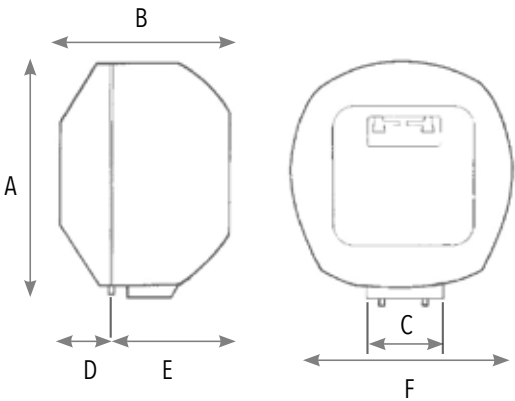

Models	A mm	B mm	C mm	D mm	E mm	F mm
B 30	535	325	100	120	205	460

Models	Thermal Dispersion 65° (Kwh/24h)	Power Watts*	Voltage Volts	Heating Time dt 50°C	Max Temperature C°	Max Pressure (bar)	Humidity Protection	Class Insul.	Profile	Energy Class
B 30	0,70	1500	230	75'	75	8	IPX4	I	S	C