



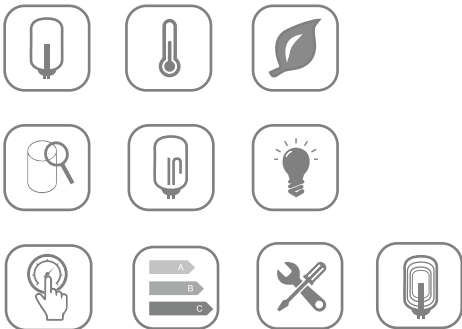

Q
12/15

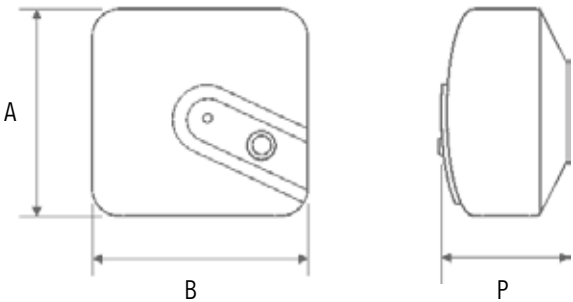

Models	A mm	B mm	P mm
Q12 SP	350	350	260
Q12 ST	350	350	260
Q15 SP	350	350	290
Q15 ST	350	350	290

Models	Thermal Dispersion 65° (Kwh/24h)	Power Watts*	Voltage Volts	Heating Time dt 50°C	Max Temperature C°	Max Pressure (bar)	Humidity Protection	Class Insul.	Profile	Energy Class
Q12 SP	0,38	1500	230	30'	65	8	IPX4	I	XXS	B
Q12 ST	0,38	1500	230	30'	65	8	IPX4	I	XXS	B
Q15 SP	0,42	1500	230	32'	65	8	IPX4	I	XXS	B
Q15 ST	0,42	1500	230	32'	65	8	IPX4	I	XXS	B