


SO

50/80/100/120/
150/200

Available with right or left connections

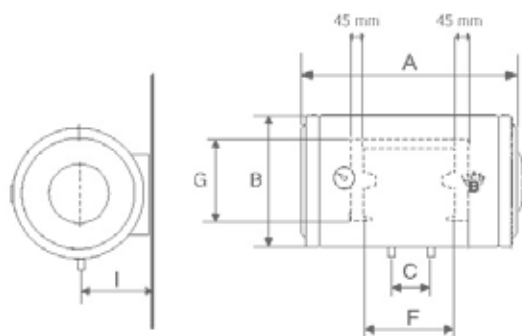

Model	A mm	B mm	C mm	D mm	F mm	G mm	I mm
SO 50	510	460	100	155	125	350	240
SO 80	700	460	100	145	330	350	240
SO 100	805	460	100	145	435	350	240
SO 120	1000	460	100	210	510	350	240
SO 150	935	550	140	210	450	350	285
SO 200	1105	550	140	190	640	350	285

Model	Thermal Dispersion 65° (Kwh/24h)	Power Watts*	Voltage Volts	Heating Time dt 50°C	Max Temperature C°	Max Pressure (bar)	Humidity Protection	Class Insul.	Profile	Energy Class
SO 50	1,11	1500	230	170°	75	8	IPX4	I	M	C
SO 80	1,61	1500	230	260°	75	8	IPX4	I	M	C
SO 100	1,66	1500	230	245°	75	8	IPX4	I	M	C
SO 120	2,02	1500	230	315°	75	8	IPX4	I	L	C
SO 150	2,29	2000	230	416°	75	8	IPX4	I	XL	C
SO 200	2,55	2000	230	499°	75	8	IPX4	I	XL	C

*Power of the heating element is optional for the customers; they can use 1200-1500-2000 Watts.