




STX

80-100-120-150-200

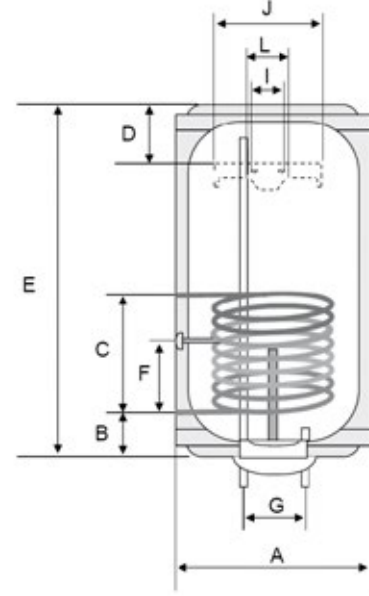

Model	A mm	B mm	C mm	D mm	E mm	F mm	G mm	I mm	J mm	S m ²
STX 80	460	185	265	130	700	135	100	70	350	0,459
STX 100	460	185	350	160	805	215	100	70	350	0,714
STX 120	460	185	350	170	1000	215	100	70	350	0,714
STX 150	550	247	350	180	935	130	140	70	350	0,951
STX 200	550	247	350	180	1105	130	140	70	350	0,951

- +** ELİPS ŞEKLİNDE SERP.
- +** SENSOR BAĞLANTI
- +** YÜKSEK VERİMLİ
- +** ISI EŞANJÖR

Model	Isı Kaybı 65° (Kwh/24h)	Güç Watt*	Voltaj Volt	Isıtma Süresi dt 50°C	Maks. Sıcaklık C°	Maks. Basınç (bar)	Koruma Sınıfı	İzolas. Sınıfı	Profil	Enerji Sınıfı
STX 80	1,32	1200	230	260'	75	8	IPX4	I	M	C
STX 100	1,51	1500	230	245'	75	8	IPX4	I	M	C
STX 120	1,84	1500	230	315'	75	8	IPX4	I	L	C
STX 150	2,09	2000	230	416'	75	8	IPX4	I	XL	C
STX 200	2,42	2000	230	500'	75	8	IPX4	I	XL	D